

# EST46NF

combitel-the flexible choice

VERSALIFT



Telescopic  
boom models



Articulated low  
boom models



110° flyboom



Up to 17.0m



Up to 7.3m  
200kg SWL

# VERSALIFT

## features & benefits


- The double boom system allows up and over capability
- Ideal for highway lighting applications
- Lightweight platforms for greater spare payload
- Critical fasteners are torqued and sealed
- Full platform function emergency power
- Emergency stop at platform and pedestal
- Full functions at ground on 5m wander lead
- Aluminium inner telescopic boom
- Steel outer boom and pedestal
- Van or truck mount

## specifications

	EST46NF
max. working height	17.0m
max. platform height	15.0m
horizontal outreach@200kg SWL	7.3m
horizontal outreach@120kg SWL optional	8.4m
fly boom	110°standard /180°optional
non continuous rotation	360°
articulated lower boom	0° to 45°
articulated lower boom special order*	0° to 70°
main boom	-7° to 80°
min GVW	5.2t

\*Requires 7.5t GVW vehicle or above.

Please note that SWL, material handling capabilities, outreach and working height vary according to specification of platform and base vehicle. Above figures are intended as best guide only. Versalift is certified to ISO 9001: 2000 by TUV UK quality assurance Ltd; number GB00468.

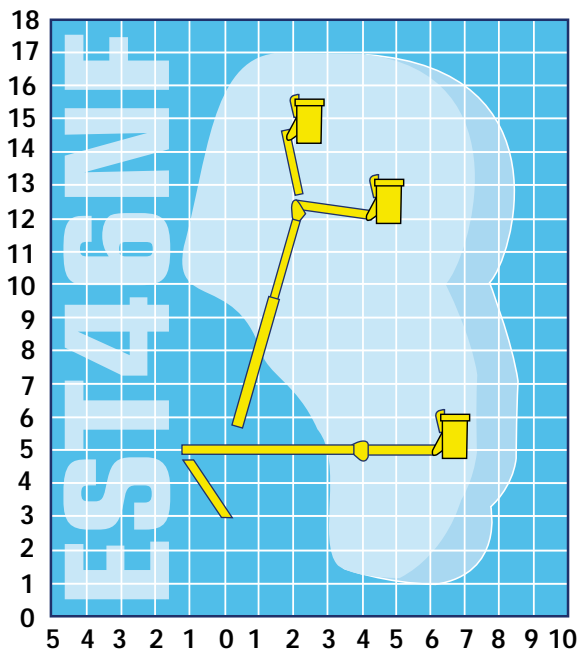

All dimensions in metres

Reach of EST46NF (2 man)  Reach of EST46NF (1 man)



[www.versalift.co.uk](http://www.versalift.co.uk)

1 Altendiez Way, Latimer Park, Burton Latimer, Northants. NN15 5YT  
Tel: 01536 721010 Fax: 01536 721111 email: sales@versalift.co.uk

The photographs in this brochure are for promotional purposes only. Specifications are subject to change without notice.